


6 Wireless products



WIRELESS RECEIVER WITH MODBUS COMMUNICATION

MR32W is a Modbus receiver that can pair with up to 32 wireless sensors and detectors. It monitors the sensors and reports the information to the user via Modbus communication.

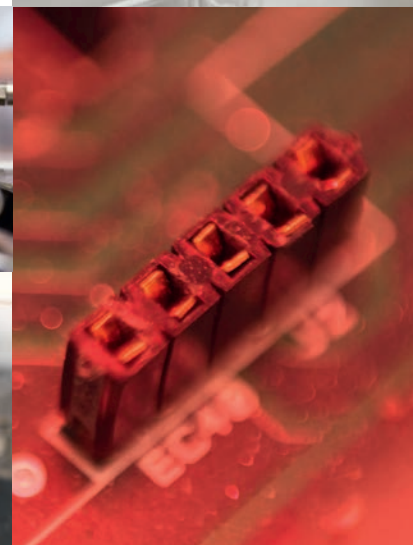

MR32W

Technical data

Supply voltage	24 V AC/DC (21...27 V AC/DC)
Frequency	868 MHz
Protection class	IP54
Ambient temperature	-10...+50 °C
Ambient humidity	Max. 85 % RH, non-condensing
Dimensions, external (WxHxD)	120 x 112 x 40 mm

Article	Description
MR32W	Wireless 32 channel receiver with Modbus communication

WIRELESS ROOM TEMPERATURE AND HUMIDITY SENSOR

High quality room temperature and humidity sensor within.



SAUW

Technical data

Power supply	AA 1.5 V L91 battery x 2
Frequency	868 MHz
Protection class	IP30
Measuring range, temperature	-10...+50 °C
Measuring range, humidity	0...100 % RH
Dimensions, external (WxHxD)	86 x 86 x 30 mm

Article	Description
SAUW	Wireless room temperature and humidity sensor

WIRELESS OUTDOOR TEMPERATURE SENSOR

Sensor for outdoor temperature measurement.



SEW-PT1000

Technical data

Power supply	CR123A 3V lithium battery x 2
Frequency	868 MHz
Protection class	IP54
Ambient temperature	-40...+50 °C
Ambient humidity	up to 95 % RH non-condensing

Article	Description
SEW	Wireless outdoor temperature sensor
SEW-PT1000	Wireless outdoor temperature sensor equipped with a terminal for connecting an external PT1000 sensor

WIRELESS CEILING MOUNTED MOTION DETECTOR

SIR-SW is a high quality ceiling mounted motion detector. The detector maintains a stable and highly sensitive level of detection regardless of changes in the environment. It has a communication range of up to 300 meters in open space.



SIR-SW

Technical data	
Supply voltage	CR123A 3V lithium battery x 1 (CR123A)
Frequency	868 MHz
Protection class	IP20
Ambient temperature	-10...+45 °C
Ambient humidity	Max. 85 % RH (non-condensing)

Article	Description
SIR-SW	Wireless ceiling mounted IR motion detector

WIRELESS MOTION DETECTOR

SIR-PW is a high quality IR motion detector. The detector maintains a stable and highly sensitive level of detection regardless of changes in the environment. It has a communication range of up to 300 meters in open space.



SIR-PW

Technical data	
Supply voltage	CR123A 3V lithium battery, 1500 mAh x 1 (pre-installed)
Frequency	868 MHz
Protection class	IP20
Ambient temperature	-10...+50 °C
Ambient humidity	Max. 85 % RH (non-condensing)

Article	Description
SIR-PW	Wireless motion detector

WIRELESS DIGITAL INPUT/DOOR CONTACT

CFW is a digital input/door contact detecting opening of door or window.



CFW

Technical data	
Power supply	CR2 3V lithium battery
Frequency	868 MHz
Protection class	IP30
Ambient temperature	-10...+50 °C
Ambient humidity	Max. 85 % RH (non-condensing)

Article	Description
CFW	Wireless digital input / door contact